



EcoSlender Hand Dryer

The slim high speed hand dryer with a sleek design. EcoSlender makes everyone's hand drying experience even more accommodating. Its thin profile only protrudes 4 inches (10cm) from the wall. It has patented parallel dual air outlets resulting in high drying efficiency with quiet operation.



HIGH SPEED RANGE

Why EcoSlender?

Specs



air speed 70-82 m/s



standby power 0.3-0.4W



1.0kW only



IP24

Design



parallel dual air outlets
enhance drying efficiency



less than 4" from the wall



heater on/off



sound & power
adjustment



fewer materials
save resource



recycled and reused

In Use



10-15 seconds
drying time



save 80% of energy cost



three safety protections



60s timing protection




easy to clean



easy maintenance

Specification

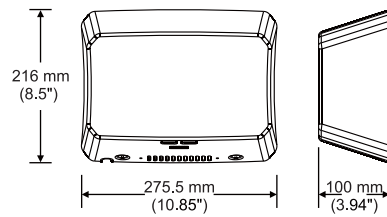


Model Name: EcoSlender01

Cover Finish: White Powder Coating

Cover Material: Stainless Steel (#304)

Operation: Automatic

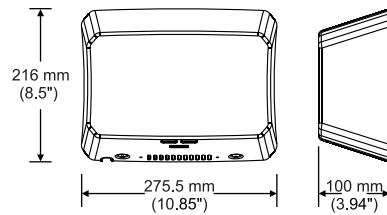


Model Name: EcoSlender01B

Cover Finish: Matte Black Powder Coating

Cover Material: Stainless Steel (#304)

Operation: Automatic

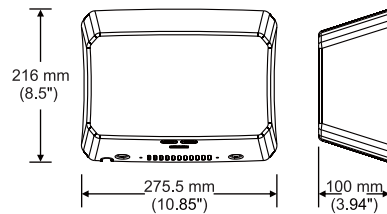


Model Name: EcoSlender04

Cover Finish: Bright

Cover Material: Stainless Steel (#304)

Operation: Automatic

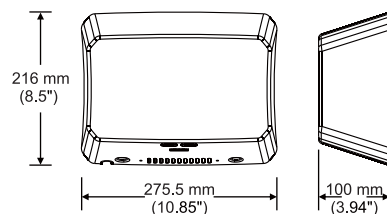


Model Name: EcoSlender05

Cover Finish: Satin

Cover Material: Stainless Steel (#304)

Operation: Automatic

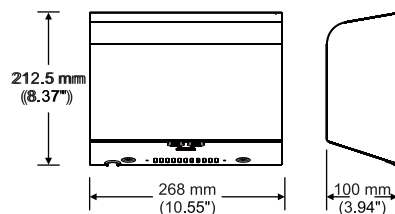


Model Name: EcoSlender SA

Cover Finish: Bright

Cover Material: Stainless Steel (#304)

Operation: Automatic

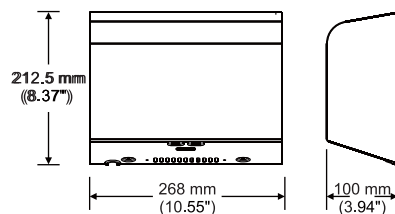

Model Name: EcoSlender SA

Cover Finish: Satin

Cover Material: Stainless Steel (#304)

Operation: Automatic



Specification

Packaging (carton):	4 dryer/carton. G.W. 17.9 kg. Meas. 2.1'
Drying Time:	Less than 10-15 seconds
Operating Voltage:	110-120 Vac, 50/60 Hz, 7.6-8.4 A, 0.84-1.0 kW 220-240 Vac, 50/60 Hz, 3.8-4.2 A, 0.84-1.0 kW
Motor Wattage:	325-500 W, Adjustable
Standby Power:	0.3-0.4 W
Air Speed:	70-82 m/s, Adjustable
Sound Level:	MIN 72.8 to 77.6 dB MAX @ 1m
Sensing Range:	170 ± 20 mm, Adjustable
Drip Proof:	IP24
Timing Protection:	60 seconds auto shut off
Motor Thermal Protection:	Auto resetting thermostat turns unit off, at 95 °C (203 °F)
Heater Thermal Protection:	Auto resetting thermostat turns unit off at 85 °C (185 °F) Thermal fuse cuts unit off at 142 °C (185 °F)

Safety Approvals:



PVD Color

