



# EcoSlender


The slim high speed hand dryer with a sleek design. EcoSlender makes everyone's hand drying experience even more accommodating. Its thin profile only protrudes 4 inches (10 cm) from the wall. It has patented parallel dual air outlets resulting in high drying efficiency with quiet operation.



HIGH SPEED RANGE

## Why EcoSlender?

### Specs


 air speed 70-82 m/s

 standby power 0.3-0.4W

 1kW only


 IP 24


### Design


 parallel dual air outlets  
enhance drying efficiency

 less than 4" from the wall


 heater on/off

 sound & power  
adjustment


 fewer materials  
save resource

 recycled and reused

### In Use


 10-15 seconds  
drying time

 save 80% of energy cost

 three safety protections

 60s timing protection

 easy to clean



 easy maintenance




# Specification



EcoSlender 01\_04\_05

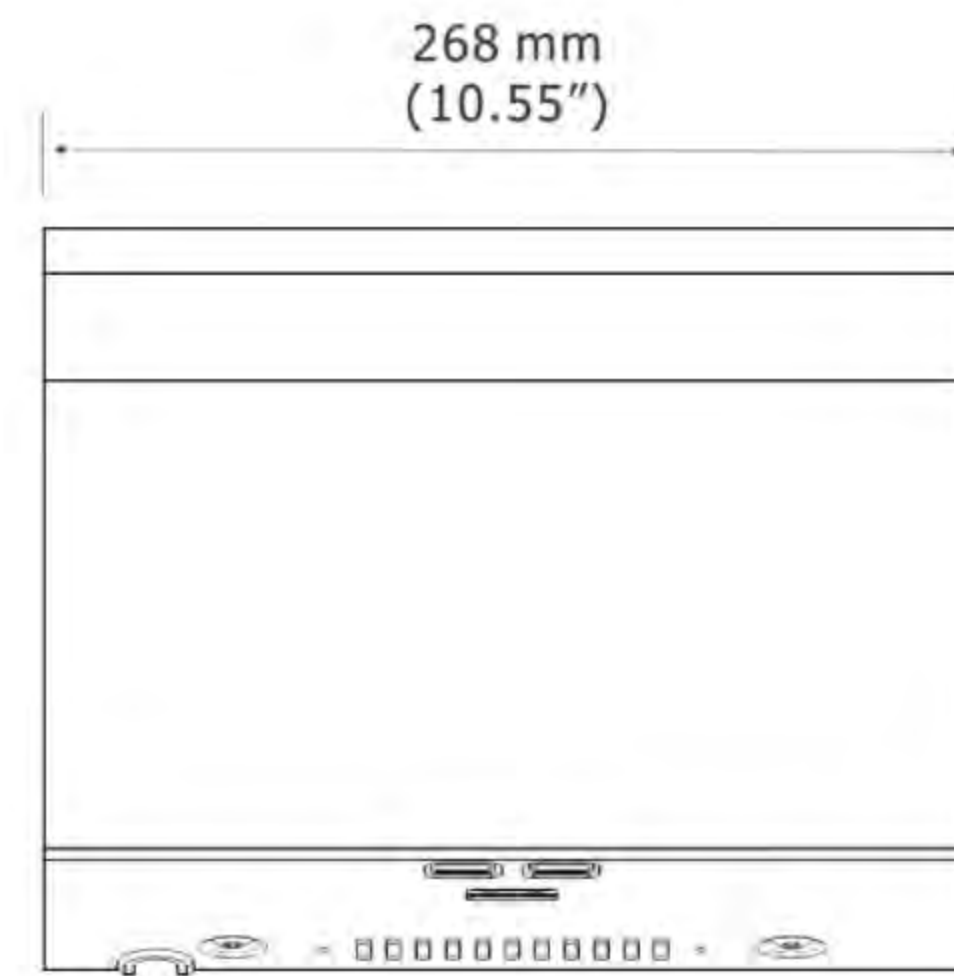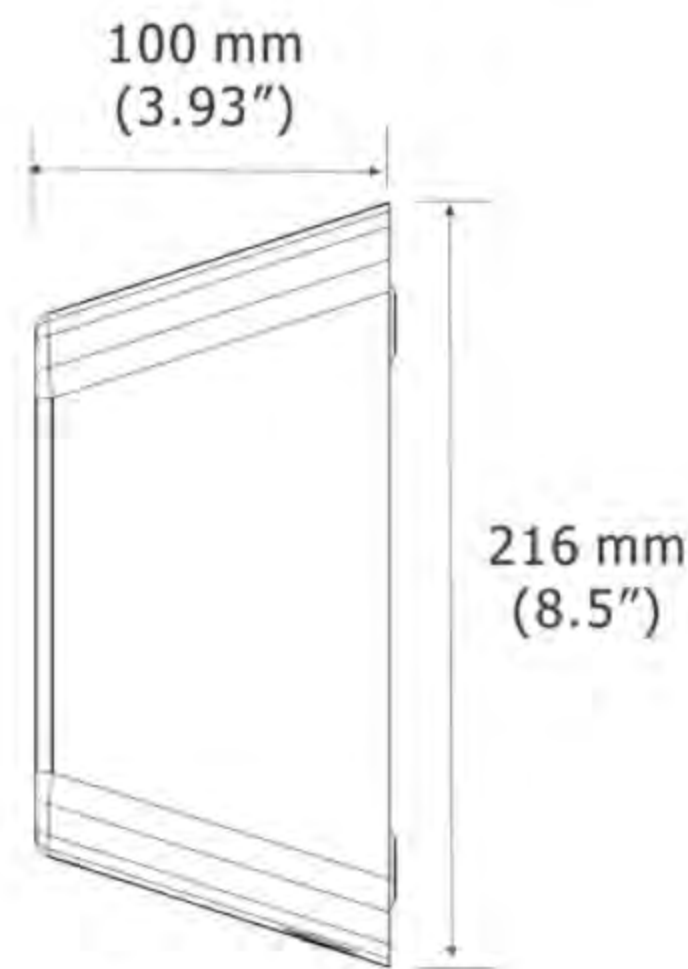

EcoSlenderSA 06\_07

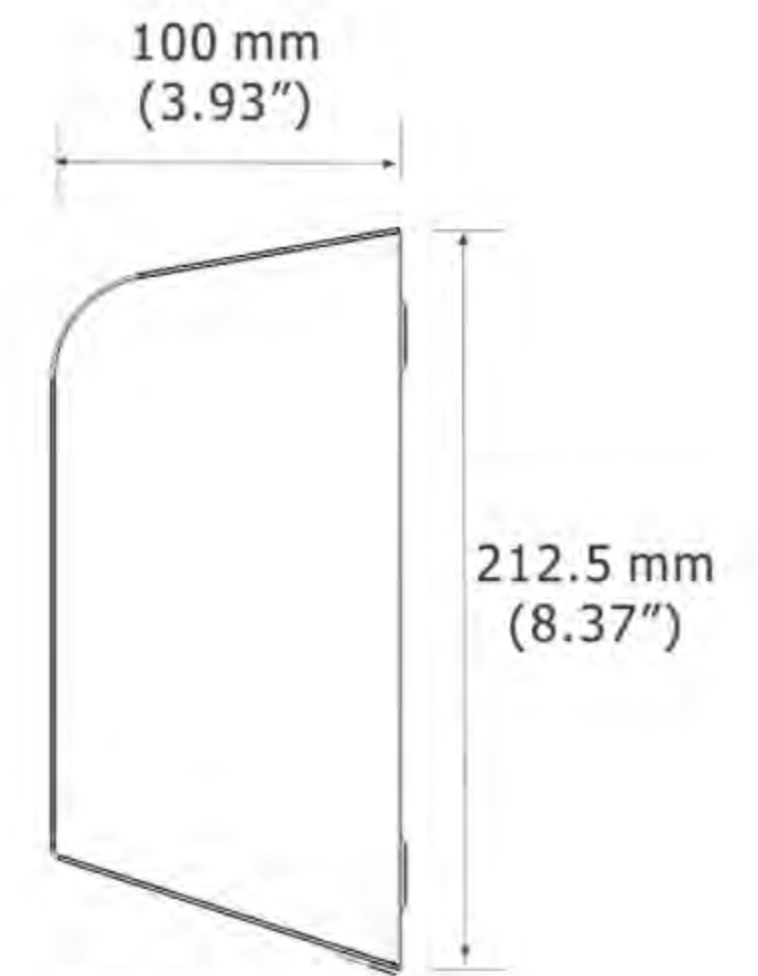

<b>Cover Finish</b>	EcoSlender01- White Epoxy Finish EcoSlender04, SA06-Bright Finish EcoSlender05, SA07-SatinFinish
<b>Cover Material</b>	EcoSlender01- Steel EcoSlender04, 05, SA06, SA07-Stainless Steel
<b>Packaging (carton)</b>	4 dryers/carton. Gross weight 17.9kg. Measurement 2.1'
<b>Drying Time</b>	Less than 10-15 seconds
<b>Operating Voltage</b>	110V-120Vac, 50/60 Hz, 0.84-1.0kW 220V-240Vac, 50/60 Hz, 0.84-1.0kW
<b>Motor Wattage</b>	325-500W, Adjustable
<b>Standby Power</b>	0.3-0.4W
<b>Air Speed</b>	70-82 m/s, Adjustable
<b>Sound Level</b>	MIN 72.8 dB to 77.6 dB MAX @ 1m
<b>Sensing Range</b>	170 mm ± 20 mm, Adjustable
<b>Drip Proof</b>	IP24
<b>Timing Protection</b>	60 seconds auto shut off
<b>Motor Thermal Protection</b>	Auto resetting thermostat turns unit off, 120V at 135°C(275°F), 240V at 95°C(203°F)
<b>Heater Thermal Protection</b>	Auto resetting thermostat turns unit off at 85°C(185°F) Thermal fuse cuts unit off at 142°C(288°F)

## Safety Approvals



WEEE RoHS

