



EcoTap (Deck-Mounted)

A high speed hand dryer that is hidden below deck with only the spout affixed to the wash basin, which creates a new clutter-free washroom experience. Users can dry their hands right after they wash them. EcoTap also simplifies the cleaning process because all water goes into the basin. EcoTap is ideal for construction projects. Designers can customized the spout to match any washroom.



HIGH SPEED RANGE

Why EcoTap?

Specs

air speed 84-101 m/s

standby power 0.3-0.4w

1kW only

IP35

carbon filter assembly

Design

intelligent temperature control technology

smart air outlet design

gradient led light

sound & power adjustment

standard deck opening diameter: 35mm

In Use

10-15 seconds drying time

save more than 80% of energy cost




three safety protections

60s timing protection

easy to clean

easy maintenance

Specification

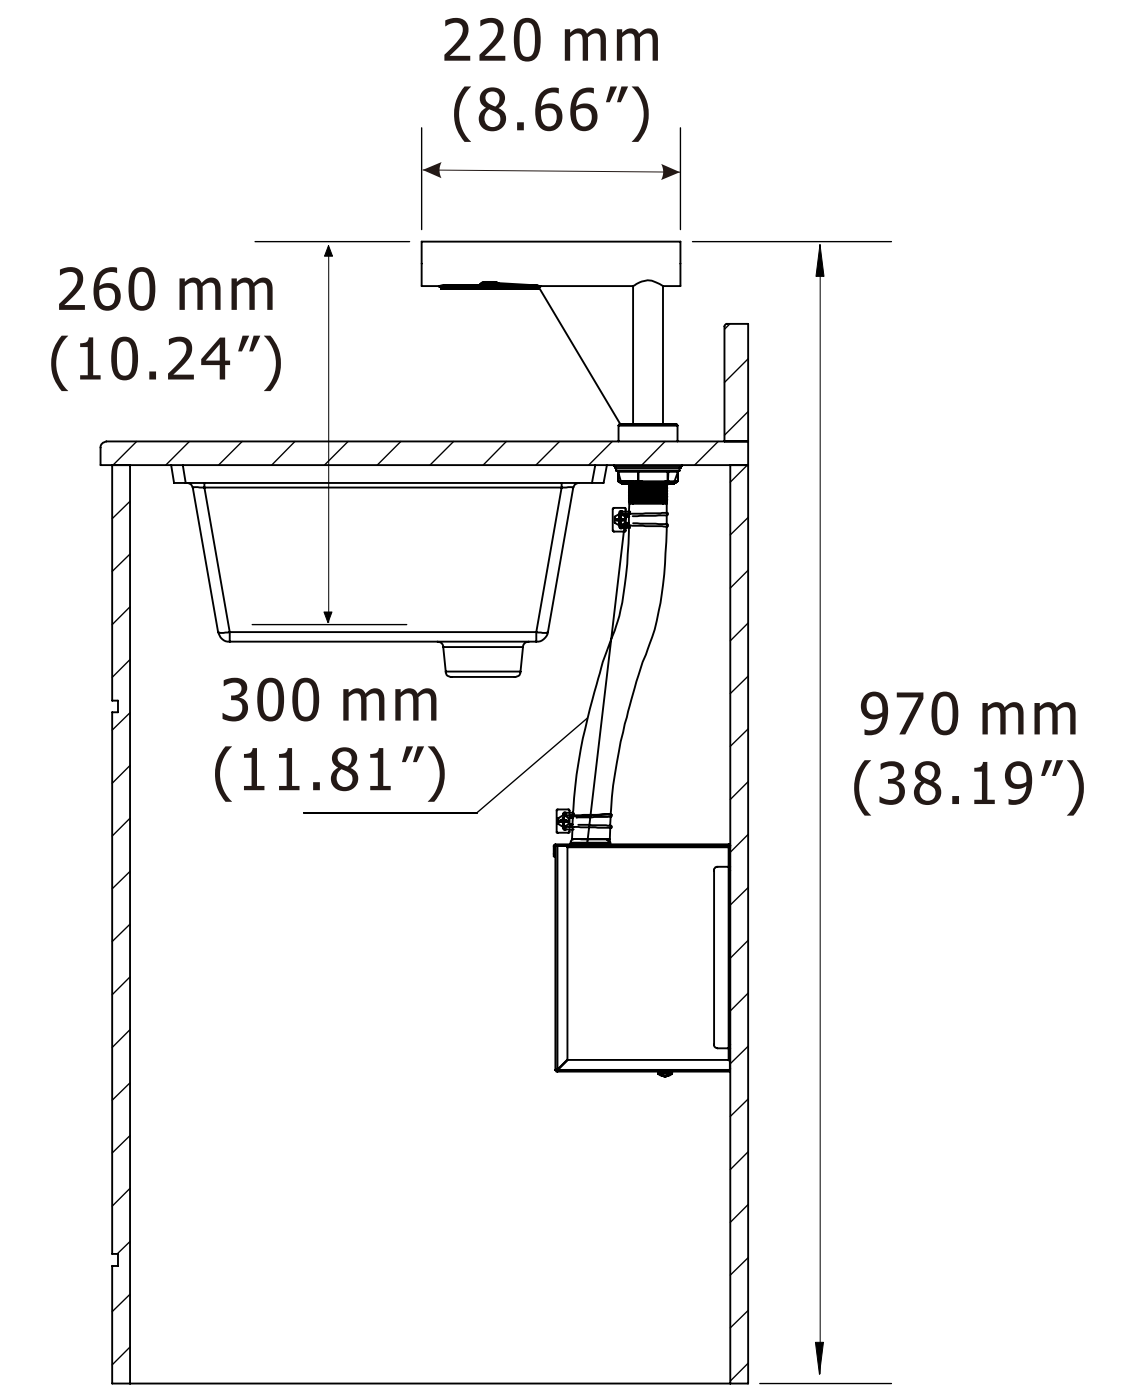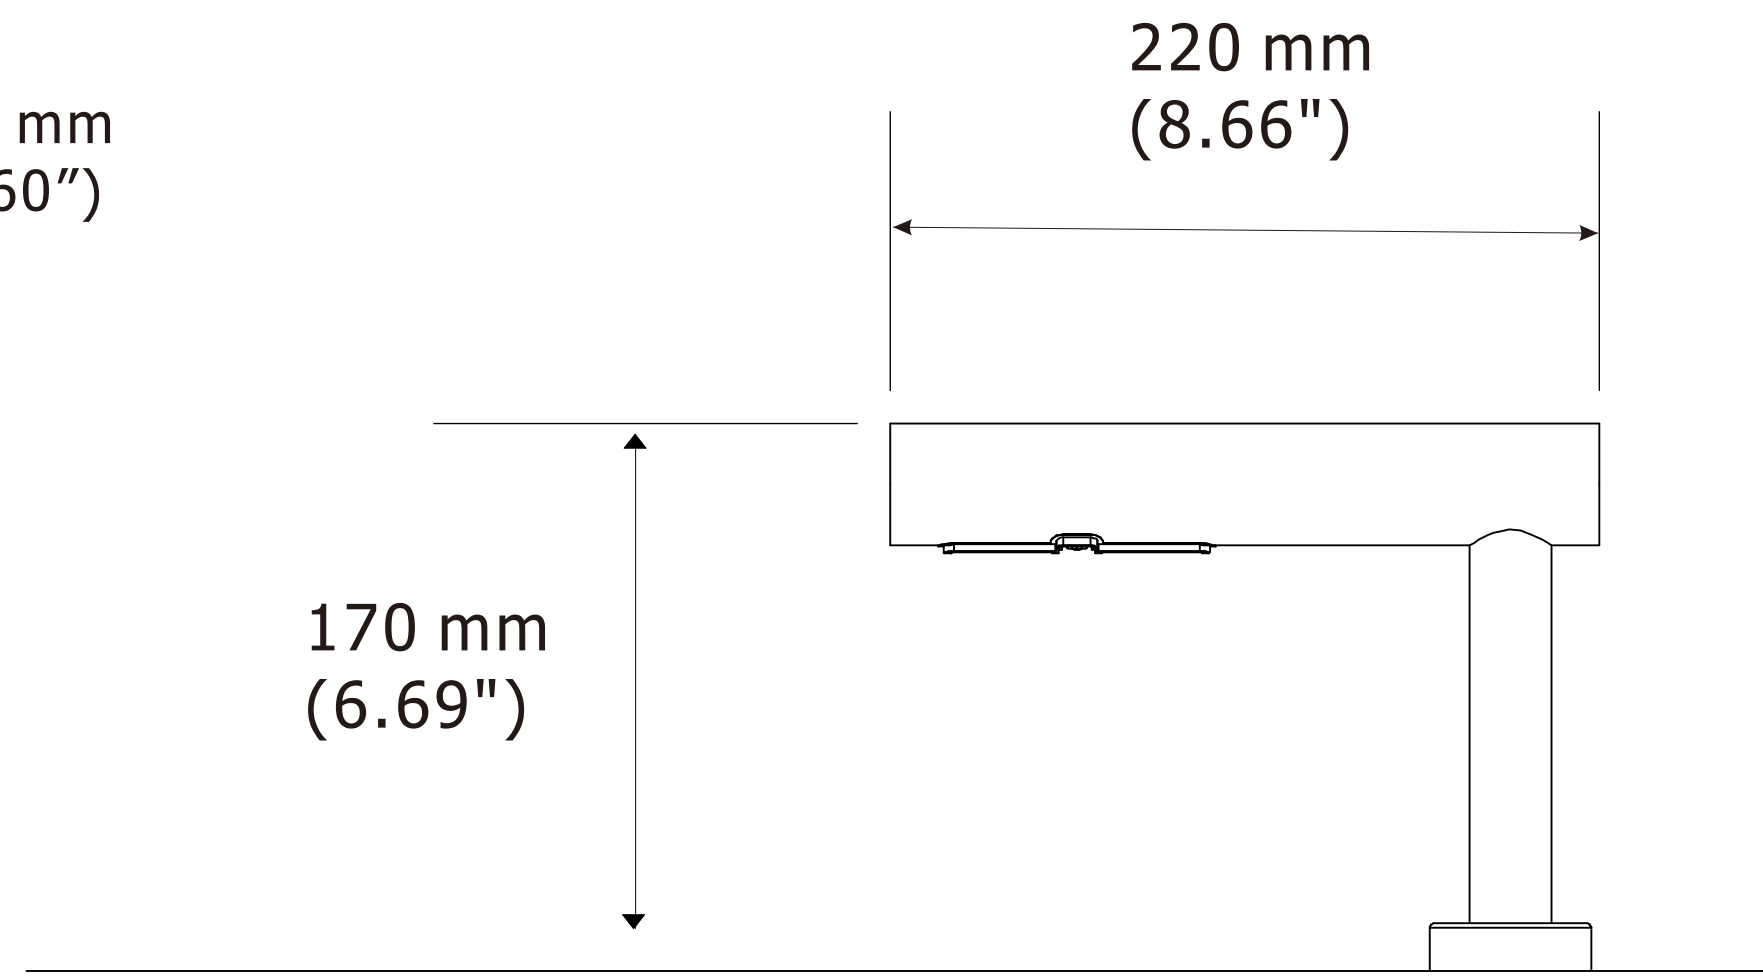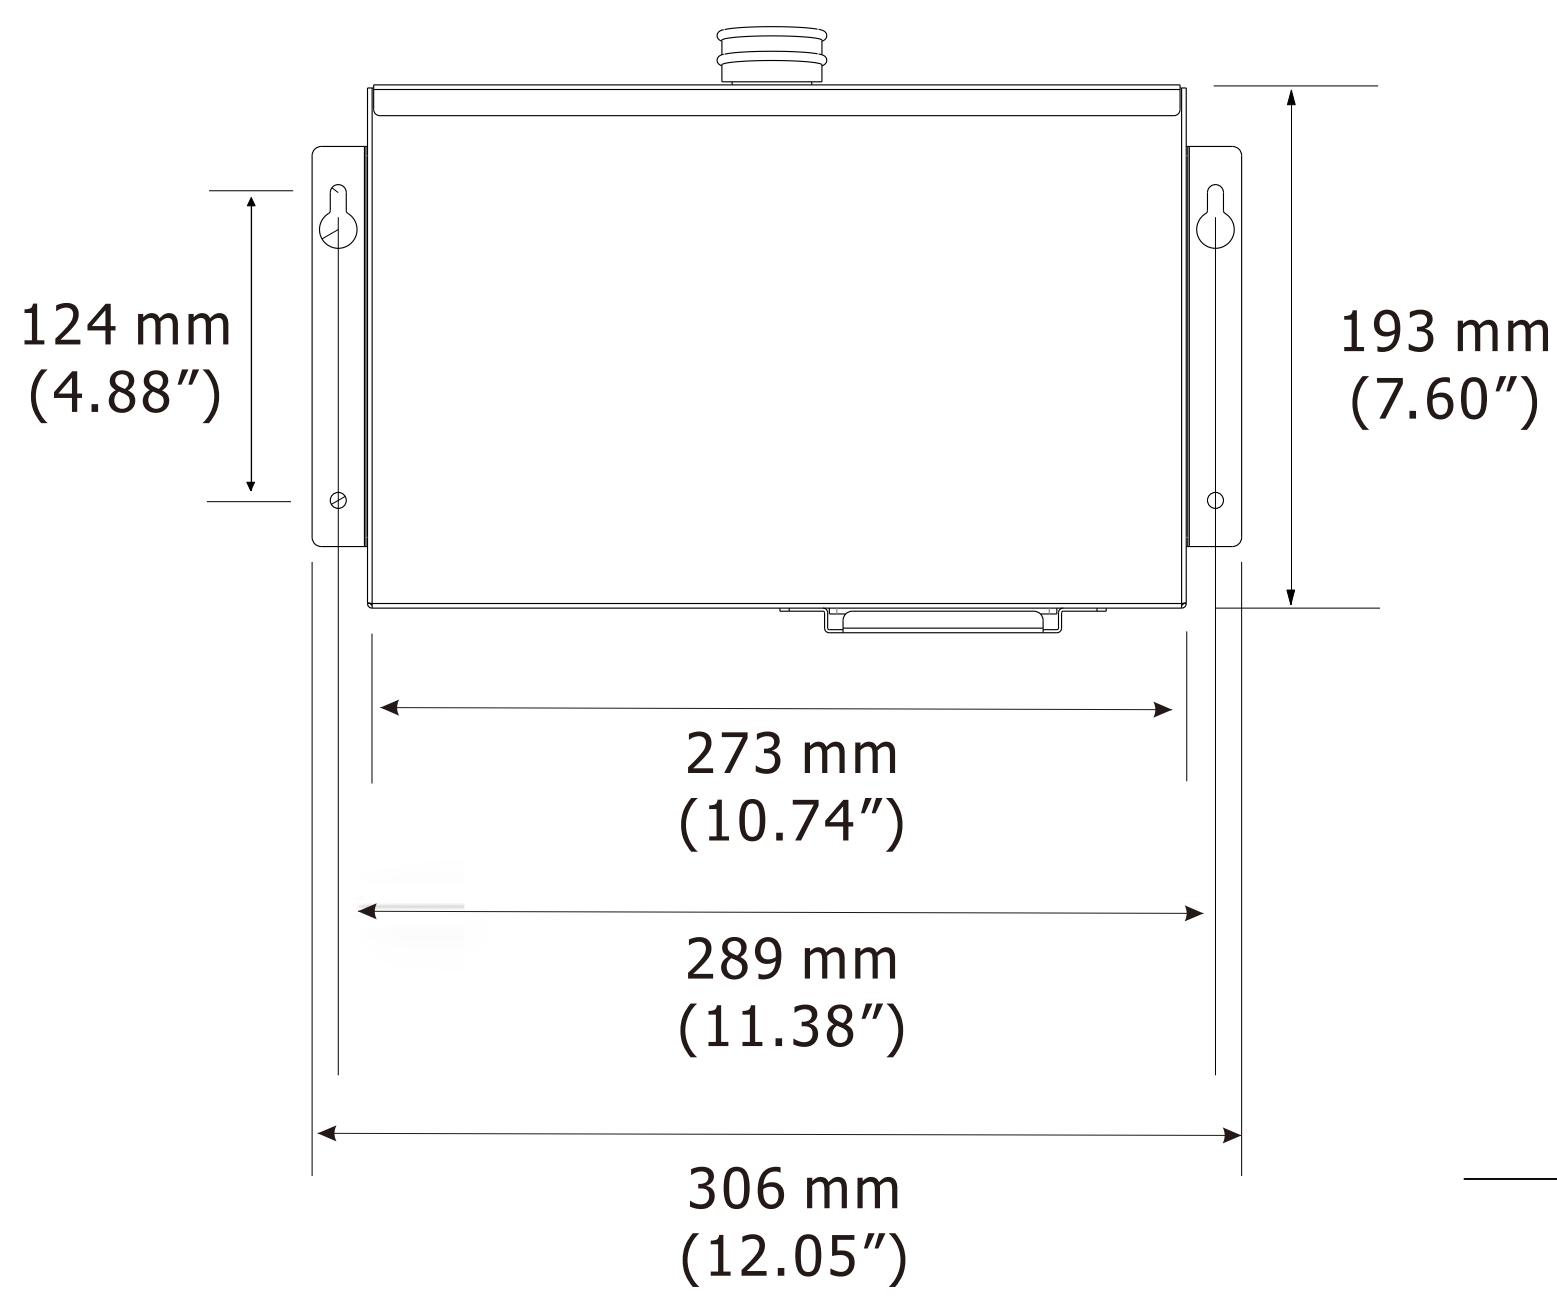

Demonstration only. Dimensions depending on desk thickness.

| | |
|----------------------------------|---|
| Cover Finish | Satin Finish |
| Cover Material | Stainless Steel |
| Packaging (carton) | 1 dryer/carton. Gross weight 8.1kg. Measurement 1.6' |
| Drying Time | Less than 10-15 seconds |
| Operating Voltage | 110V-120Vac, 50/60 Hz, 0.84-1.0kW 220V-240Vac, 50/60 Hz, 0.84-1.0kW |
| Motor Wattage | 500W |
| Standby Power | 0.3-0.4W |
| Air Speed | 84-101 m/s, Adjustable |
| Sound Level | MIN 58.8 dB to 62.9 dB MAX @ 1m |
| Sensing Range | 130 mm ± 20 mm, Adjustable |
| Drip Proof | IP35 |
| Timing Protection | 60 seconds auto shut off |
| Motor Thermal Protection | Auto resetting thermostat turns unit off, 120V at 135°C(275°F), 240V at 95°C(203°F) |
| Heater Thermal Protection | Auto resetting thermostat turns unit off at 85°C(185°F) Thermal fuse cuts unit off at 142°C(288°F) |

Safety Approvals



WEEE RoHS

