



EcoTap (Wall-Mounted)


A high speed hand dryer that is hidden behind wall with only the spout affixed to the wash basin, which creates a new clutter-free washroom experience. Users can dry their hands right after they wash them. EcoTap also simplifies the cleaning process because all water goes into the basin. EcoTap is ideal for construction projects. Designers can customized the spout to match any washroom.




HIGH SPEED RANGE

Why EcoTap?

Specs

 air speed 93-110 m/s


 standby power 0.3-0.4w


 1kW only


 IP35


 carbon filter assembly


Design

 intelligent temperature control technology


 smart air outlet design


 gradient led light


 sound & power adjustment


 standard wall opening diameter: 35mm


In Use


 10-15 seconds drying time

 save more than 80% of energy cost


 three safety protections

 60s timing protection

 easy to clean

 easy maintenance

Specification

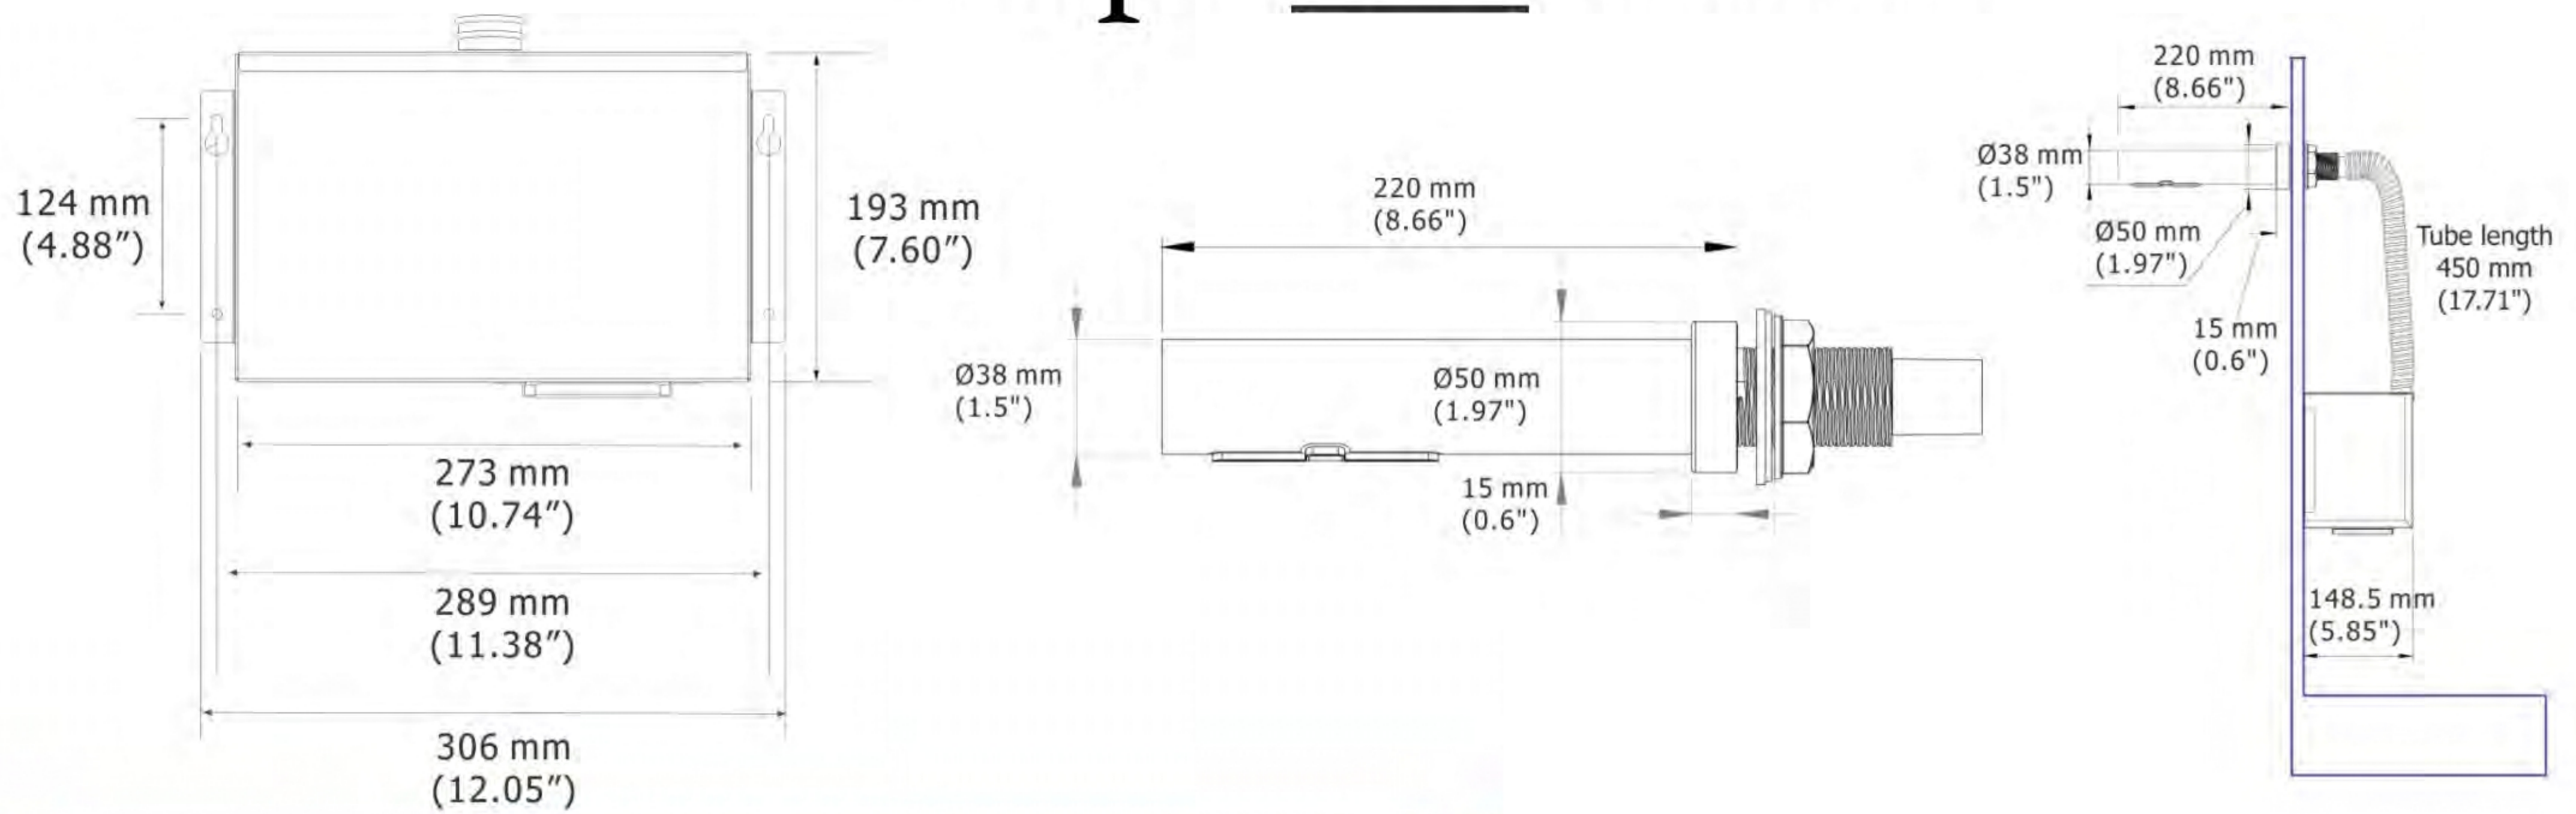

| | |
|----------------------------------|---|
| Cover Finish | Satin Finish |
| Cover Material | Stainless Steel |
| Packaging (carton) | 1 dryer/carton. Gross weight 8.1kg. Measurement 1.6' |
| Drying Time | Less than 10-15 seconds |
| Operating Voltage | 110V-120Vac, 50/60 Hz, 0.84-1.0kW 220V-240Vac, 50/60 Hz, 0.84-1.0kW |
| Motor Wattage | 500W |
| Standby Power | 0.3-0.4W |
| Air Speed | 93-110 m/s, Adjustable |
| Sound Level | MIN 59.2 dB to 63.8 dB MAX @ 1m |
| Sensing Range | 130 mm ± 20 mm, Adjustable |
| Drip Proof | IP35 |
| Timing Protection | 60 seconds auto shut off |
| Motor Thermal Protection | Auto resetting thermostat turns unit off, 120V at 135°C(275°F), 240V at 95°C(203°F) |
| Heater Thermal Protection | Auto resetting thermostat turns unit off at 85°C(185°F) Thermal fuse cuts unit off at 142°C(288°F) |

Safety Approvals



WEEE

RoHS

