



# HK-1800

It provides a warm breeze with little noise, which is perfect for children and places requiring quiet space. It is equipped with induction motors, which last a lifetime thus removing the need to change any brushes. This conventional hand dryer uses warm air, giving the warmth appreciated in cold winters.



CONVENTIONAL RANGE

## Why HK-1800?

### Specs



most economical



heater assembly 1700W



1.8 kW



IP21

### Design



sensing range adjustment



anti-disturbance



blue action light



five different cover design

### In Use



30-35 seconds drying time



quiet operation



three safety protections



60s timing protection




easy to clean




easy maintenance


# Specification

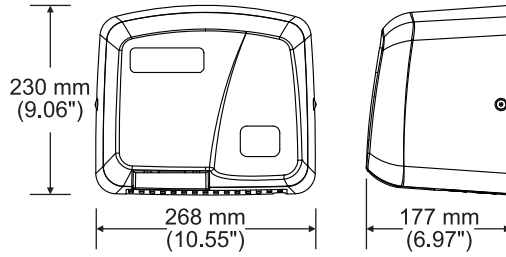


**Model Name:** HK-1800PA  
**Cover Material:** ABS  
**Operation:** Automatic

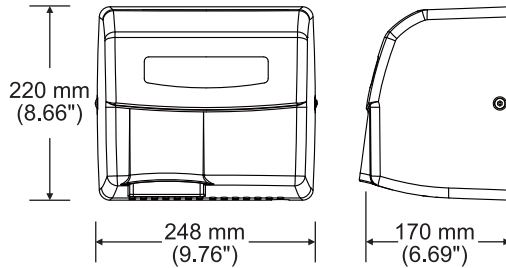


**Model Name:** HK-1800EA  
**Cover Finish:** Painted Cast  
**Cover Material:** Aluminum  
**Operation:** Automatic

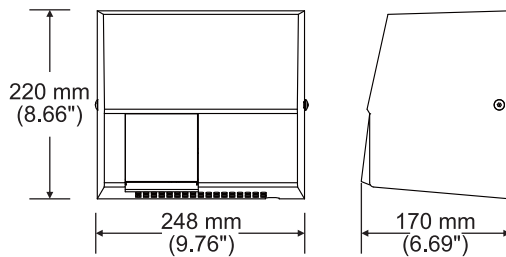

**Model Name:** HK-1800SA  
**Cover Finish:** Satin  
**Cover Material:** Stainless Steel (#304)  
**Operation:** Automatic

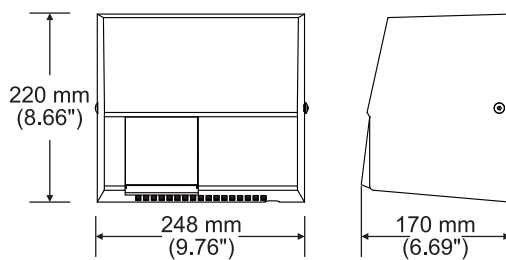

**Model Name:** HK-1800SA(F)  
**Cover Finish:** Satin  
**Cover Material:** Stainless Steel (#304)  
**Operation:** Automatic

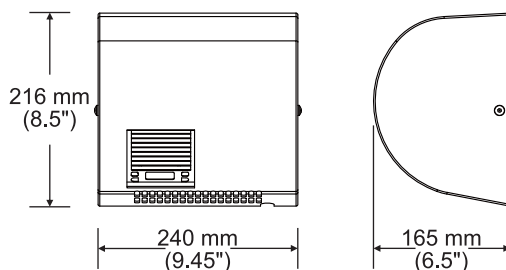

**Model Name:** HK-1800SRA (brush motor)  
**Cover Finish:** Satin  
**Cover Material:** Stainless Steel (#304)  
**Operation:** Automatic



# Specification

Packaging (carton)	HK-1800PA: 4 dryers/carton. Gross weight 17.0 kg. Measurement 2.5' HK-1800EA: 4 dryers/carton. Gross weight 23.8 kg. Measurement 3.1' HK-1800SA: 4 dryers/carton. Gross weight 23.8 kg. Measurement 3.1' HK-1800SRA: 4 dryers/carton. Gross weight 26.5 kg. Measurement 3.1'
Drying Time	Less than 30-35 seconds
Operating Voltage	110V-120 Vac, 50/60 Hz, 13.8-15 A, 1.5-1.8 kW 220V-240 Vac, 50/60 Hz, 6.9-7.5 A, 1.5-1.8 kW
Motor Wattage	100 W 200 W (Only HK-1800SRA)
Standby Power	1.5 W
Air Speed	14.5 m/s 20.5 m/s (Only HK-1800SRA)
Sound Level	63 ± 3 dB MAX @ 1m 70 ± 5 dB MAX @ 1m (Only HK-1800SRA)
Sensing Range	180 ± 20 mm, Adjustable
Drip Proof	IP21
Timing Protection	60 seconds auto shut off
Motor Thermal Protection	Auto resetting thermostat turns unit off at 105 °C (221 °F) Auto resetting thermostat turns unit off at 100 °C (212 °F) (Only HK-1800SRA)
Heater Thermal Protection	Auto resetting thermostat turns unit off at 70 °C (158 °F) Thermal fuse cuts unit off at 142 °C (288 °F)

Safety Approvals



**WEEE RoHS**

