



HK-2400

This conventional hand dryer uses warm air, giving the warmth appreciated in cold winters. HK-2400 is efficient, fast and safe. Furthermore, HK-2400 is a long life, durable hand dryer suitable for installation in high traffic places, and it is easily maintained.



CONVENTIONAL RANGE

Why HK-2400?

Specs



heater assembly 2200W



2.4 kW



IP21/ IP23 (optional)

Design



enamel coating create a superior durability



vandal-resistant



sensing range adjustment



anti- disturbance



blue action light



five different cover design

In Use



20-25 seconds drying time



double safety protections



60s timing protection




easy to clean



easy maintenance

Specification

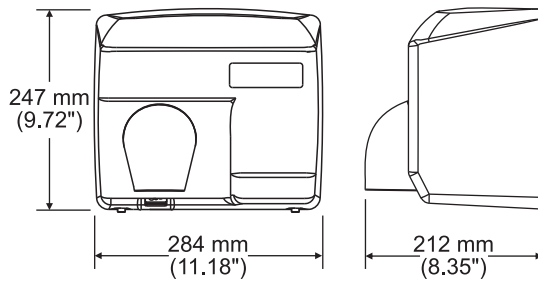


Model Name: HK-2400PA

Cover Finish: Porcelain Enameled Coating

Cover Material: Steel

Operation: Automatic

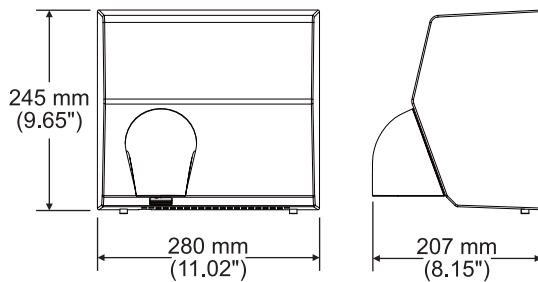


Model Name: HK-2400SA

Cover Finish: Satin

Cover Material: Stainless Steel (#304)

Operation: Automatic

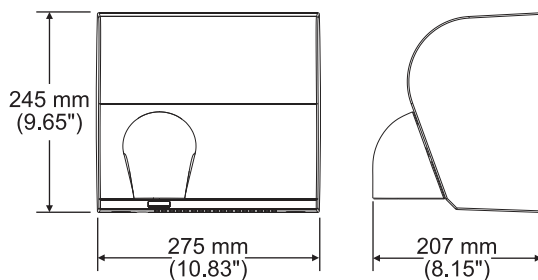

Model Name: HK-2400SAN

Cover Finish: Satin

Cover Material: Stainless Steel (#304)

Operation: Automatic



Specification

Packaging (carton)	2 dryers/carton. Gross weight 17.8 kg. Measurement 2.4'
Drying Time	Less than 20-25 seconds
Operating Voltage	110V-120 Vac, 50/60 Hz, 18.3-20 A, 2.0-2.4 kW 220V-240 Vac, 50/60 Hz, 9.2-10 A, 2.0-2.4 kW
Motor Wattage	200 W
Standby Power	1.5 W
Air Speed	28 m/s
Sound Level	70 ± 3 dB @ 1m
Sensing Range	180 ± 20 mm, Adjustable
Drip Proof	IP21/IP23 (optional)
Timing Protection	60 seconds auto shut off
Motor Thermal Protection	Auto resetting thermostat turns unit off at 105 °C (221 °F)
Heater Thermal Protection	Auto resetting thermostat turns unit off at 65 °C (149 °F)

Safety Approvals



WEEE RoHS

