

Omni Tap-D SD

Deck-mounted liquid/foam soap dispenser



Features

Design:

Featuring a wide, flat-profile body with clean lines and smooth contours, this design showcases a modern industrial geometric aesthetic.


LED Indication:

A decorative front panel seamlessly integrates the indicator light, enhancing product visibility while adding a refined, premium finish.



Flexible Power Supply Options:


The dispenser comes with an AC power connection as standard. For installation where AC power is unavailable, an optional external battery box can be selected.

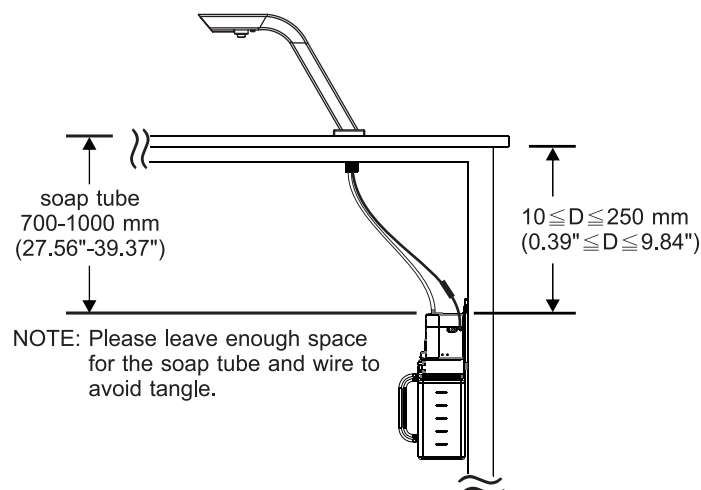

Technical Specification

Operating Voltage	Input: 100-240 Vac, 50/60 Hz ; Output: DC 6V
Soap Pump Life	100,000 cycles
Mechanism Life	500,000 cycles
Sensing Range	100 ± 20 mm (3.93" ± 0.79")
Standby Light	Green light
Viscosity Range	Liquid: 1-3000 cP (mPa•s) Foam: 1-5 cP (mPa•s), Foaming soap only
Light Indication	Solid red light: wrong type of soap Flashing green light: empty soap bottle (1500 ml soap bottle only)
Smart Design	All key parts are independent for easy maintenance. Container assembly and mechanism of dispenser are 100% separation; mechanism is free from damage by soap.
Spout Material	Bright Chrome Brass
Safety Approvals	CE RoHS LVD EMC

Spout

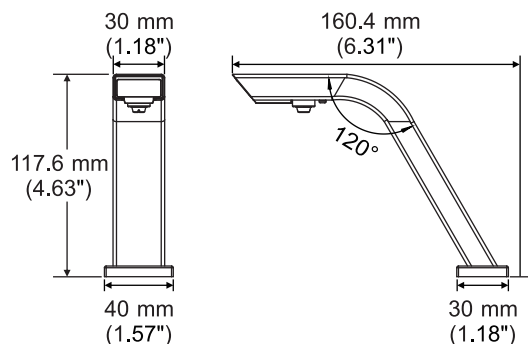

Mechanism

